



ZQGQ Self-resetting overvoltage and undervoltage


ZQGQ only occupies one position, and the installation dimension of self-resetting overvoltage and undervoltage protector

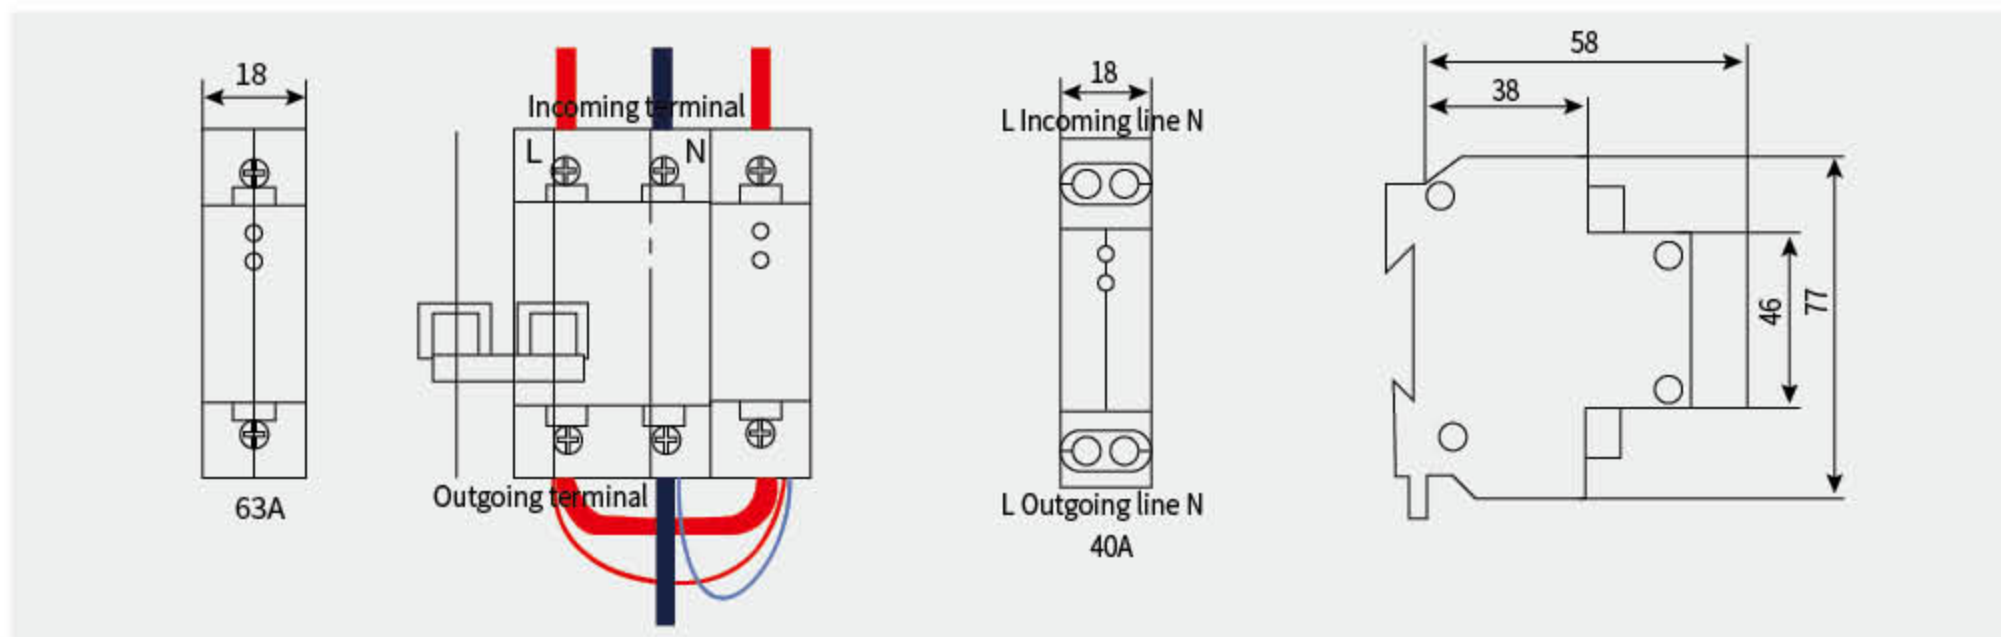

Installation dimension of ZQGQ-63 self-resetting overvoltage and undervoltage protector

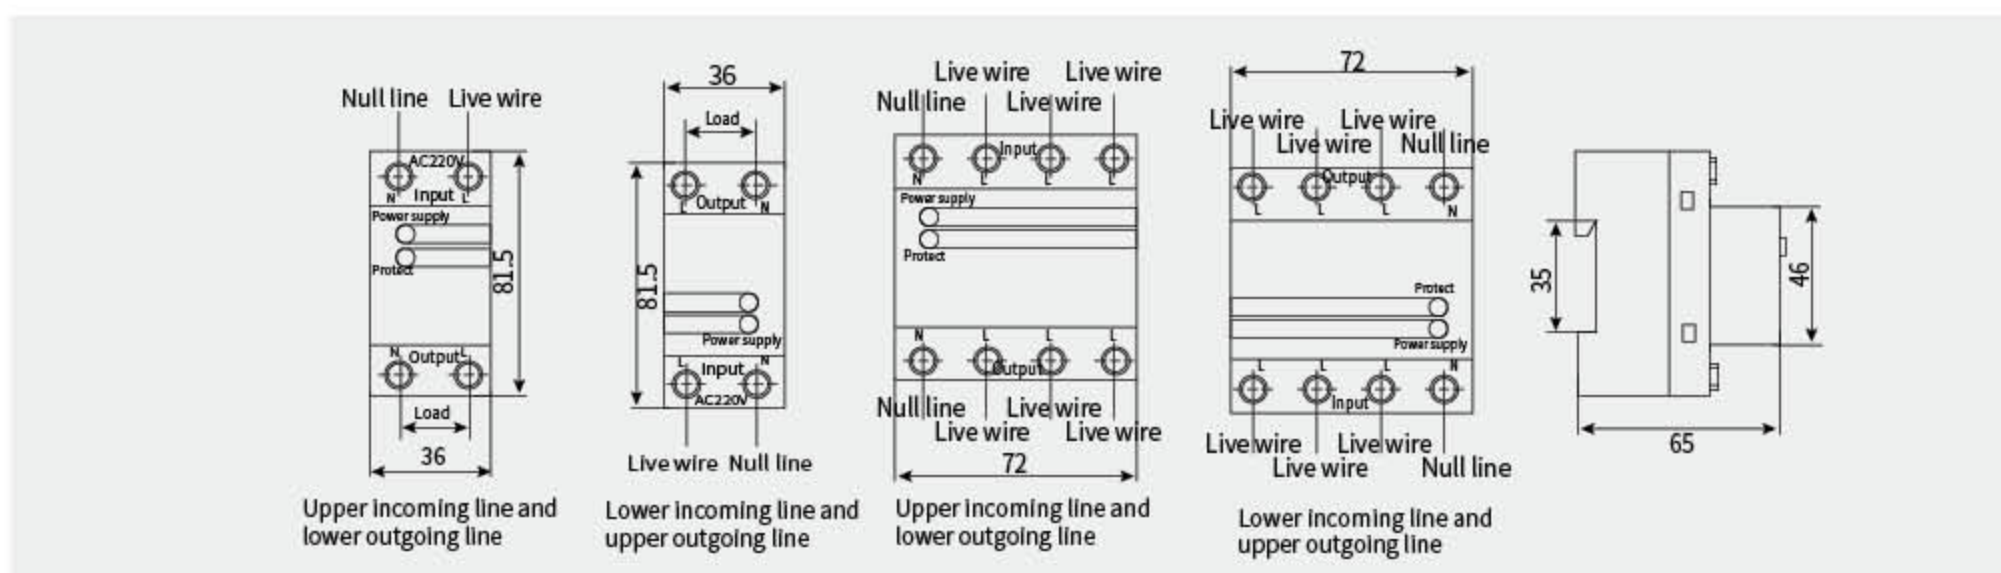

Installation dimension of ZQGQ-125 self-resetting overvoltage and undervoltage protector

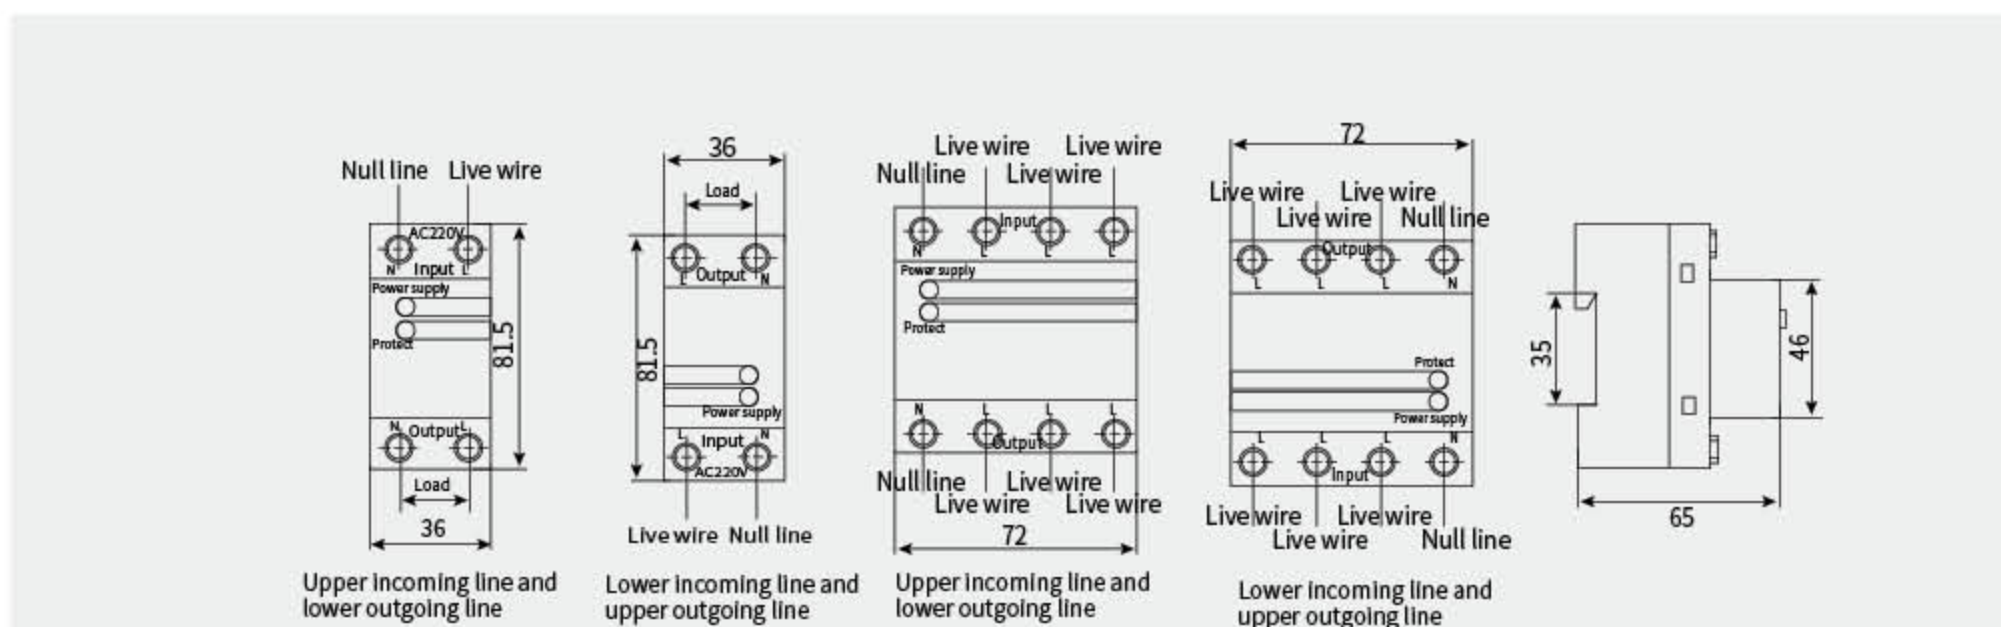

- ◇ See the figure above for the overall dimension (mm);
- ◇ Allowable operating temperature range: -40 °C ~ +85 °C ;
- ◇ This product is TH35mm guide rail;
- ◇ The altitude shall not exceed 2000m;
- ◇ Relative air temperature ≤ 85%;